


Modular International

579^e LED Modules

50mm, 70mm,
and 90mm LED
modules available
with filter rings,
shielding cylinders,
and filter media.

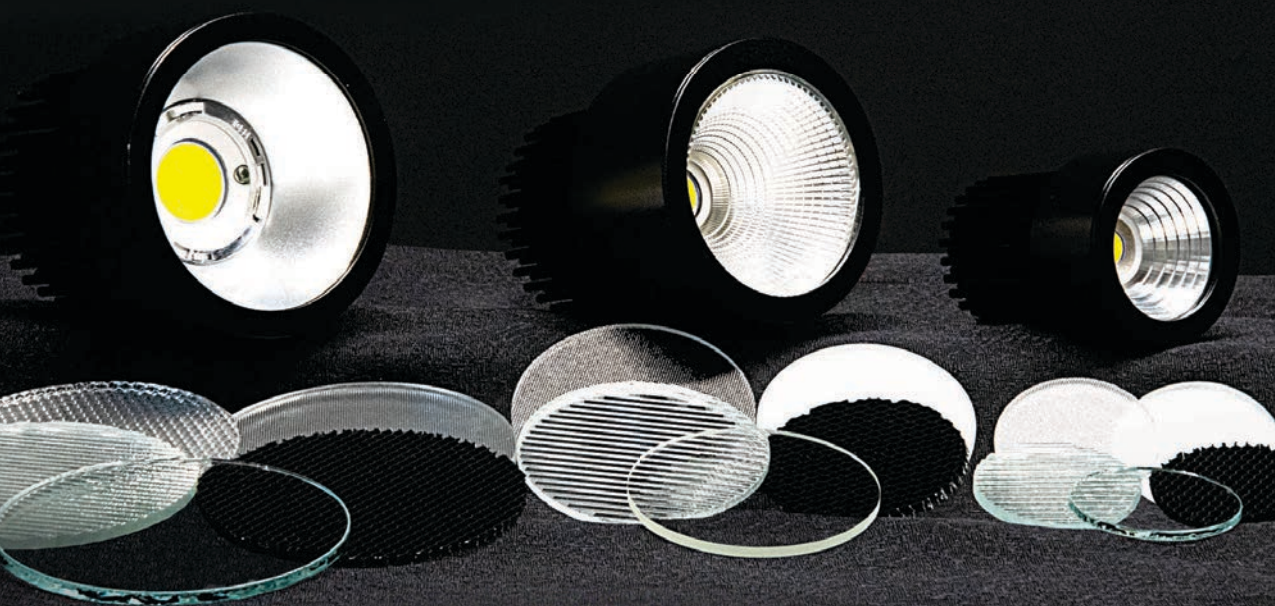

Modular Multiples®


The Original Multiple Lamp Family of Fixtures



579e Available 50mm LED Modules

Model Number*	Watts	Beam Angle	CRI	Lumens**	Lumens per watt	Tested K-Temp***
LED-507-20	7	20°	90+	798	114	2700K
LED-507-30	7	30°	90+	758	108	2700K
LED-507-40	7	40°	90+	761	109	2700K
LED-508-20	8	20°	90+	1,060	133	2700K
LED-508-30	8	30°	90+	988	124	2700K
LED-508-40	8	40°	90+	1,001	125	2700K
LED-510-20	10	20°	90+	1,245	125	2700K
LED-510-30	10	30°	90+	1,177	118	2700K
LED-510-40	10	40°	90+	1,189	119	2700K
LED-511-20	11	20°	90+	1,362	124	2700K
LED-511-30	11	30°	90+	1,289	117	2700K
LED-511-40	11	40°	90+	1,309	119	2700K
LED-512-20	12	20°	90+	1,458	122	2700K
LED-512-30	12	30°	90+	1,385	115	2700K
LED-512-40	12	40°	90+	1,407	117	2700K

* Catalog specification example: LED-507-20



**All lumen values listed above are delivered lumen totals.

***Available in 2700K, 3000K, 3500K & 4000K

Modular Multiples®

The Original Multiple Lamp Family of Fixtures




579e Available 50mm LED Modules

Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


LED-507-20

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
5983 lx	1496 lx	665 lx	374 lx	239 lx	166 lx	122 lx	93 lx	74 lx	60 lx	49 lx	42 lx	35 lx	31 lx	27 lx	23 lx	21 lx	18 lx	17 lx	15 lx
555.9 fc	139.0 fc	61.8 fc	34.7 fc	22.2 fc	15.4 fc	11.3 fc	8.7 fc	6.9 fc	5.6 fc	4.6 fc	3.9 fc	3.3 fc	2.8 fc	2.5 fc	2.2 fc	1.9 fc	1.7 fc	1.5 fc	1.4 fc

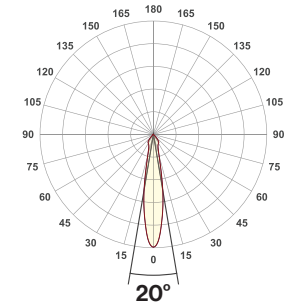


LED-507-30

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
2781 lx	695 lx	309 lx	174 lx	111 lx	77 lx	57 lx	43 lx	34 lx	28 lx	23 lx	19 lx	16 lx	14 lx	12 lx	11 lx	10 lx	9 lx	8 lx	7 lx
258.3 fc	64.6 fc	28.7 fc	16.1 fc	10.3 fc	7.2 fc	5.3 fc	4.0 fc	3.2 fc	2.6 fc	2.1 fc	1.8 fc	1.5 fc	1.3 fc	1.1 fc	1.0 fc	0.9 fc	0.8 fc	0.7 fc	0.6 fc

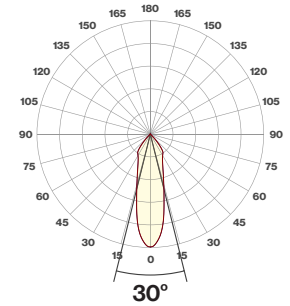

LED-507-40


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
1927 lx	482 lx	214 lx	120 lx	77 lx	54 lx	39 lx	30 lx	24 lx	19 lx	16 lx	13 lx	11 lx	10 lx	9 lx	8 lx	7 lx	6 lx	5 lx	5 lx
179.0 fc	44.8 fc	19.9 fc	11.2 fc	7.2 fc	5.0 fc	3.7 fc	2.8 fc	2.2 fc	1.8 fc	1.5 fc	1.2 fc	1.1 fc	0.9 fc	0.8 fc	0.7 fc	0.6 fc	0.6 fc	0.5 fc	0.4 fc

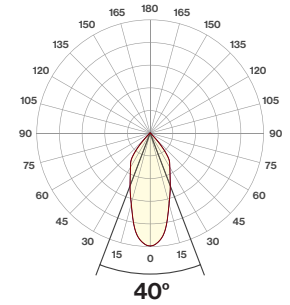

Filter Ring / Shielding Cylinder / Filter Media


Applicable to all Modular LED modules.

GIMBAL RING ASSEMBLY

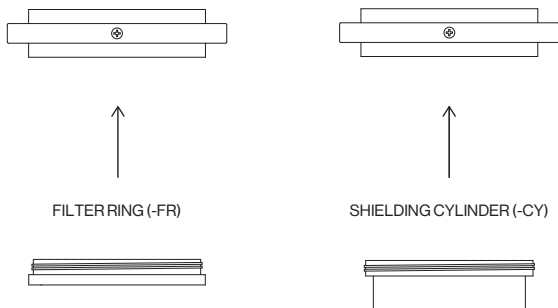


FILTER MEDIA


CLEAR GLASS (-CG)




DIFFUSING SPREAD (-DS)




HEXCELL LOUVER (-HL)




LINEAR SPREAD (-LS)



PRISMATIC WIDE SPREAD (-PS)



SATIN ETCHED (-SE)



Modular Multiples®


The Original Multiple Lamp Family of Fixtures



579e Available 70mm LED Modules

Model Number*	Watts	Beam Angle	CRI	Lumens**	Lumens per watt	Tested K-Temp***
LED-712-20	12	20°	90+	1,591	133	2700K
LED-712-30	12	30°	90+	1,580	132	2700K
LED-712-40	12	40°	90+	1,513	126	2700K
LED-712-55	12	55°	90+	1,557	130	2700K
LED-714-20	14	20°	90+	1,885	135	2700K
LED-714-30	14	30°	90+	1,858	133	2700K
LED-714-40	14	40°	90+	1,780	127	2700K
LED-714-55	14	55°	90+	1,834	131	2700K
LED-716-20	16	20°	90+	2,203	138	2700K
LED-716-30	16	30°	90+	2,174	136	2700K
LED-716-40	16	40°	90+	2,080	130	2700K
LED-716-55	16	55°	90+	2,149	134	2700K
LED-720-20	20	20°	90+	2,650	133	2700K
LED-720-30	20	30°	90+	2,583	129	2700K
LED-720-40	20	40°	90+	2,462	123	2700K
LED-720-55	20	55°	90+	2,554	128	2700K

* Catalog specification example: LED-712-20



**All lumen values listed above are delivered lumen totals.

***Available in 2700K, 3000K, 3500K & 4000K

Modular Multiples®

The Original Multiple Lamp Family of Fixtures




579 Available 70mm LED Modules

Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


LED-712-20

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
15475 lx	3869 lx	1719 lx	967 lx	619 lx	430 lx	316 lx	242 lx	191 lx	155 lx	128 lx	107 lx	92 lx	79 lx	69 lx	60 lx	54 lx	48 lx	43 lx	39 lx
1437.7 fc	359.4 fc	159.7 fc	89.9 fc	57.5 fc	39.9 fc	29.3 fc	22.5 fc	17.7 fc	14.4 fc	11.9 fc	10.0 fc	8.5 fc	7.3 fc	6.4 fc	5.6 fc	5.0 fc	4.4 fc	4.0 fc	3.6 fc

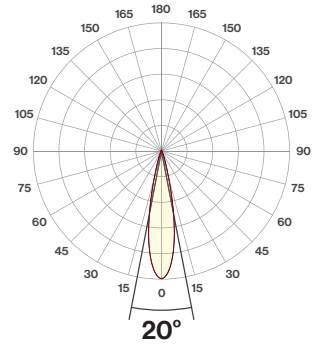


LED-712-30

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
6520 lx	1630 lx	724 lx	407 lx	261 lx	181 lx	133 lx	102 lx	80 lx	65 lx	54 lx	45 lx	39 lx	33 lx	29 lx	25 lx	23 lx	20 lx	18 lx	16 lx
605.7 fc	151.4 fc	67.3 fc	37.9 fc	24.2 fc	16.8 fc	12.4 fc	9.5 fc	7.5 fc	6.1 fc	5.0 fc	4.2 fc	3.6 fc	3.1 fc	2.7 fc	2.4 fc	2.1 fc	1.9 fc	1.7 fc	1.5 fc

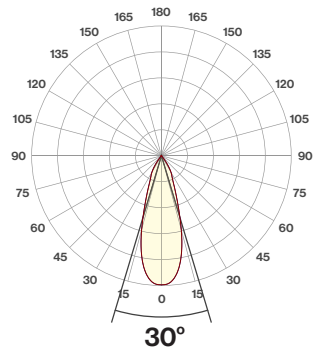


LED-712-40

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
4375 lx	1094 lx	486 lx	273 lx	175 lx	122 lx	89 lx	68 lx	54 lx	44 lx	36 lx	30 lx	26 lx	22 lx	19 lx	17 lx	15 lx	14 lx	12 lx	11 lx
406.4 fc	101.6 fc	45.2 fc	25.4 fc	16.3 fc	11.3 fc	8.3 fc	6.4 fc	5.0 fc	4.1 fc	3.4 fc	2.8 fc	2.4 fc	2.1 fc	1.8 fc	1.6 fc	1.4 fc	1.3 fc	1.1 fc	1.0 fc

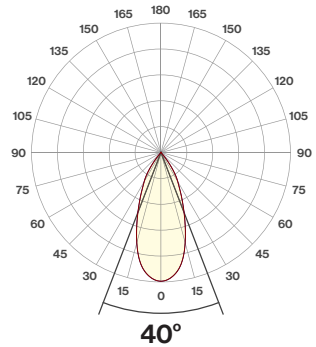

LED-712-55

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
3385 lx	846 lx	376 lx	212 lx	135 lx	94 lx	69 lx	53 lx	42 lx	34 lx	28 lx	24 lx	20 lx	17 lx	15 lx	13 lx	12 lx	10 lx	9 lx	8 lx
314.5 fc	78.6 fc	34.9 fc	19.7 fc	12.6 fc	8.7 fc	6.4 fc	4.9 fc	3.9 fc	3.1 fc	2.6 fc	2.2 fc	1.9 fc	1.6 fc	1.4 fc	1.2 fc	1.1 fc	1.0 fc	0.9 fc	0.8 fc

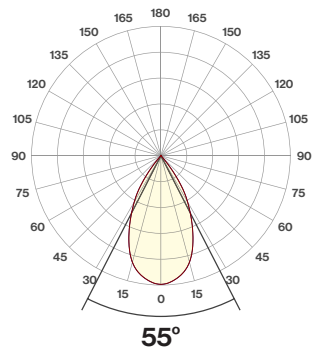

Modular Multiples®


The Original Multiple Lamp Family of Fixtures



579e Available 90mm LED Modules

Model Number*	Watts	Beam Angle	CRI	Lumens**	Lumens per watt	Tested K-Temp***
LED-920-35	20	35°	90+	3,028	151	2700K
LED-920-45	20	45°	90+	2,993	150	2700K
LED-920-60	20	60°	90+	3,019	151	2700K
LED-920-90	20	90°	90+	3,112	156	2700K
LED-926-35	26	35°	90+	3,868	149	2700K
LED-926-45	26	45°	90+	3,813	147	2700K
LED-926-60	26	60°	90+	3,871	149	2700K
LED-926-90	26	90°	90+	3,985	153	2700K
LED-929-35	29	35°	90+	4,264	147	2700K
LED-929-45	29	45°	90+	4,190	144	2700K
LED-929-60	29	60°	90+	4,272	147	2700K
LED-929-90	29	90°	90+	4,406	152	2700K
LED-932-35	32	35°	90+	4,645	145	2700K
LED-932-45	32	45°	90+	4,575	143	2700K
LED-932-60	32	60°	90+	4,652	145	2700K
LED-932-90	32	90°	90+	4,819	151	2700K
LED-935-35	35	35°	90+	5,034	144	2700K
LED-935-45	35	45°	90+	4,986	142	2700K
LED-935-60	35	60°	90+	5,095	146	2700K
LED-935-90	35	90°	90+	5,224	149	2700K

* Catalog specification example: LED-920-35



**All lumen values listed above are delivered lumen totals.

***Available in 2700K, 3000K, 3500K & 4000K

Modular Multiples®

The Original Multiple Lamp Family of Fixtures

579 Available 70mm LED Modules




Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


LED-920-35

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
7250 lx	1812 lx	806 lx	453 lx	290 lx	201 lx	148 lx	113 lx	90 lx	72 lx	60 lx	50 lx	43 lx	37 lx	32 lx	28 lx	25 lx	22 lx	20 lx	18 lx
673.5 fc	168.4 fc	74.8 fc	42.1 fc	26.9 fc	18.7 fc	13.7 fc	10.5 fc	8.3 fc	6.7 fc	5.6 fc	4.7 fc	4.0 fc	3.4 fc	3.0 fc	2.6 fc	2.3 fc	2.1 fc	1.9 fc	1.7 fc

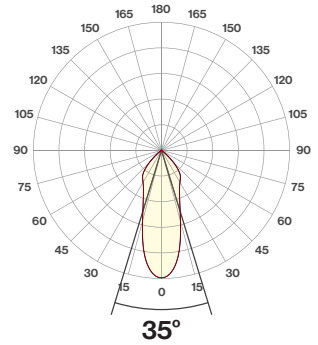


LED-920-45

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
5461 lx	1365 lx	607 lx	341 lx	218 lx	152 lx	111 lx	85 lx	67 lx	55 lx	45 lx	38 lx	32 lx	28 lx	24 lx	21 lx	19 lx	17 lx	15 lx	14 lx
507.3 fc	126.8 fc	56.4 fc	31.7 fc	20.3 fc	14.1 fc	10.4 fc	7.9 fc	6.3 fc	5.1 fc	4.2 fc	3.5 fc	3.0 fc	2.6 fc	2.3 fc	2.0 fc	1.8 fc	1.6 fc	1.4 fc	1.3 fc

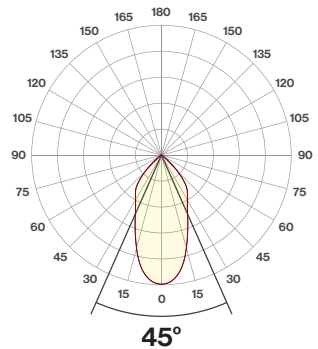

LED-920-60

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
4811 lx	1203 lx	535 lx	301 lx	192 lx	134 lx	98 lx	75 lx	59 lx	48 lx	40 lx	33 lx	28 lx	25 lx	21 lx	19 lx	17 lx	15 lx	13 lx	12 lx
446.9 fc	111.7 fc	49.7 fc	27.9 fc	17.9 fc	12.4 fc	9.1 fc	7.0 fc	5.5 fc	4.5 fc	3.7 fc	3.1 fc	2.6 fc	2.3 fc	2.0 fc	1.7 fc	1.5 fc	1.4 fc	1.2 fc	1.1 fc

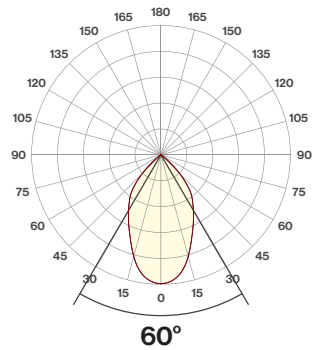

LED-920-90

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft	19.7 ft	23.0 ft	26.2 ft	29.5 ft	32.8 ft	36.1 ft	39.4 ft	42.7 ft	45.9 ft	49.2 ft	52.5 ft	55.8 ft	59.1 ft	62.3 ft	65.6 ft
2842 lx	710 lx	316 lx	178 lx	114 lx	79 lx	58 lx	44 lx	35 lx	28 lx	23 lx	20 lx	17 lx	14 lx	13 lx	11 lx	10 lx	9 lx	8 lx	7 lx
264.0 fc	66.0 fc	29.3 fc	16.5 fc	10.6 fc	7.3 fc	5.4 fc	4.1 fc	3.3 fc	2.6 fc	2.2 fc	1.8 fc	1.6 fc	1.3 fc	1.2 fc	1.0 fc	0.9 fc	0.8 fc	0.7 fc	0.7 fc

