


# TPR ILLUZION™ RGBW LINEAR V2

IP66



## Description:

The **TPR RGBW Illuzion™ Linear** fixture is a low profile extruded Aluminum fixture for Architectural and Entertainment markets. It is line Voltage 120/277VAC input, is RGBW for a multitude of colors and is available in four beam angles. It is supplied with swivel foot mount brackets for 150 degree aiming and is available in 1', 2' and 4' lengths.

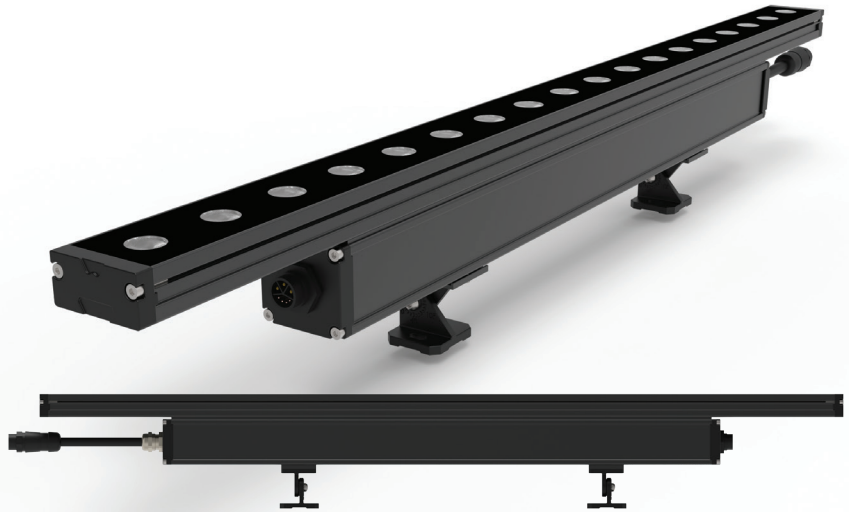

## Specifications:

**Construction:** Aluminum Housing, Tempered Glass Lens  
**Lumen Output:** (4' fixture) Red + Green + Blue = 2200 lumens  
 White = 2800 lumens  
**Beam Angles:** 15°, 30°, 45°, and 15 x 55 Degree  
**Operating Temp:** -4F to 104F (-20C to 40C)  
**Dimensions:** 2.5" W x 4"H (on feet) x 48"L  
**Power:** 65 Watts Max. (4')  
**LEDs:** Cree XPG  
**Voltage:** 120-277VAC  
**Rating:** IP66  
**Control:** DMX / RDM  
**Certifications:** ETL, CE, ROHS

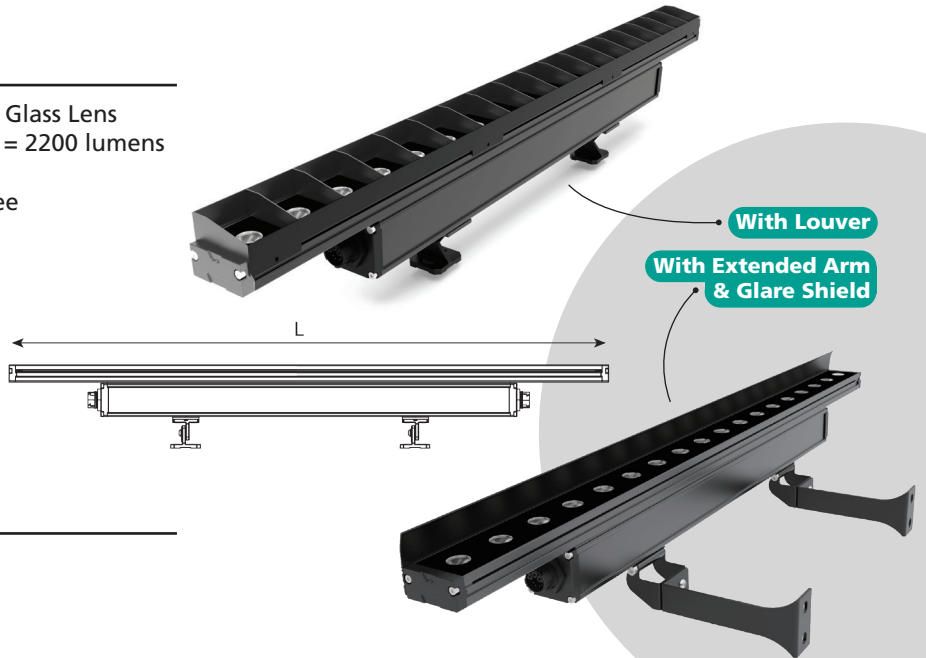

## Accessories:

**Part # Jumper Power + Data**  
 ILLV2JUMP1 1Ft. Cable IP65-IP65  
 ILLV2JUMP3 3Ft. Cable IP65-IP65  
 ILLV2JUMP5 5Ft. Cable IP65-IP65  
**Part # Power + Data Feed Cable**  
 ILLV2PWR10 10Ft. Cable IP65-Bare Ends  
 ILLV2PWR25 25Ft. Cable IP65-Bare Ends



## Ordering Logic:

MODEL	LENGTH (in feet)		RGBW	COLOR TEMP		BEAM ANGLE		OPTIONS
TPR-ILL	-	1' 2' 4'	-	2700K 3000K 4000K	-	15° 30° 45° 15 x 55°	-	LV (Louver) SH (Glare Shield) EXA (Extended Arm)